


# NEW!

## MANUAL SWIPE ENCODER

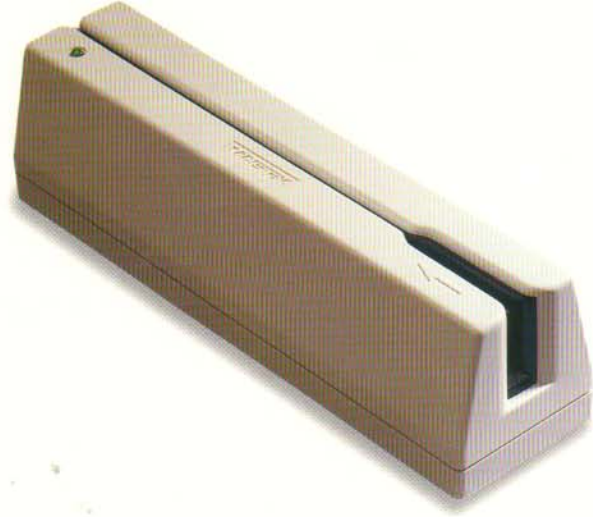

- Compatible with any PC with an RS-232 serial port
- Reads and writes magnetic stripe media including cards, tickets, badges and passbooks
- Optional software includes features such as incremental encoding and card duplication
- LED status indicator
- Available in single or three-track configurations
- Low coercivity (300 oerstead)
- Read after write verification
- Up to 1,000,000 passes with ISO-conforming cards
- 1.5 meter DB25 D female RS-232 cable

### DIMENSIONS

<b>ENCODER:</b>	L: 219mm W: 60mm H: 57mm
<b>INTERFACE CABLE:</b>	L: 1.5 meters

### OPERATING

<b>REFERENCE STANDARDS</b>	ISO and ANSI
<b>RECORDING METHOD</b>	Two-Frequency Coherent Phase (F2F)
<b>MESSAGE FORMAT</b>	ASCII
<b>SPEED RANGE/SECOND</b>	12cm - 101cm
<b>MTBF</b>	Electronics: 125,000 hours. Head: 1,00,000 passes
<b>VOLTAGE</b>	Input: 240 VAC Output: 12V DC at 500 mA

### ORDERING INFORMATION

PART NUMBER	DESCRIPTION
15033001	Track 1,2,3 LoCo reader/encoder
15033002	Track 2 LoCo reader/encoder

### ENVIRONMENTAL

TEMPERATURE	
<b>OPERATING</b>	0°C to 55°C (32°F to 131°F)
<b>STORAGE</b>	-30°C to 70°C (-22°F to 158°F)
HUMIDITY	
<b>OPERATING</b>	10% to 90% noncondensing
<b>STORAGE</b>	Up to 100% noncondensing
Altitude	
<b>OPERATING</b>	0-3,048 M.
<b>STORAGE</b>	0-15,240 M.

For more information about Mag-Tek OEM products and our full line of motorized readers, contact your Mag-Tek Representative, or call Mag-Tek at 1-800-788-6835.

## MAGTEK

20725 S. Annalee Avenue  
Carson, CA 90746  
Phone: (310) 631-8602  
Fax: (310) 631-3956

Internet: <http://www.magtek.com>

**1-800-788-6835**

**CardPOS**  
EUROPE

Tel: +44 (0) 1793 484111

Fax: +44 (0) 1793 434666

Email: [sales@cardpos.co.uk](mailto:sales@cardpos.co.uk)

Internet: <http://www.cardpos.co.uk>